



MASTER LEDtube EM/ Mains T8



MAS LEDtube 900mm HO 12W 840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data

General Information		Color Consistency	
Cap-Base	G13 ROT	Color rendering index (CRI)	<6
Nominal lifetime	75,000 hour(s)	LLMF At End Of Nominal Lifetime (Nom)	80
Switching Cycle	200,000	Photobiological safety according to EN 62471	70 %
Lighting Technology	LED		RG0
Flux measurement reference	Sphere		
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	160 degree(s)	Input Frequency	50 to 60 Hz
Luminous Flux	1,575 lm	Power Consumption	12 W
Color Designation	Cool White (CW)	Lamp Current (Max)	60 mA
Correlated Color Temperature (Nom)	4000 K	Lamp Current (Min)	50 mA
Luminous Efficacy (rated) (Nom)	131 lm/W	Starting Time (Nom)	0.5 s
		Warm-up time to 60% light	0.5 s
		Power Factor (Fraction)	0.9

MASTER LEDtube EM/Mains T8

Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	30 W
Inrush current at mains	8
Max. lamp no. on MCB B type 10A – Mains	90
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	125
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	15
Max. lamp no. on MCB B type 16A – Mains	150
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	200
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	25
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	900 mm
Bulb Shape	T8
Net Weight (Piece)	0.180 kg


Approval and Application

Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate ENEC certificate
Energy Consumption kWh/1000 h	12 kWh
EPREL Registration Number	1206963
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	0.5
Stroboscopic effect visibility measure (SVM)	0.2
Ambient temperature range	-20 °C to 45 °C

Product Data

Order product name	MAS LEDtube 900mm HO 12W 840 T8
Full product name	MAS LEDtube 900mm HO 12W 840 T8
Full product code	871869668708600
Order code	929001298402
Material Nr. (12NC)	929001298402
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8718696687086
Numerator – Packs per outer box	10
EAN/UPC – Case	8718696687093


Dimensional drawing

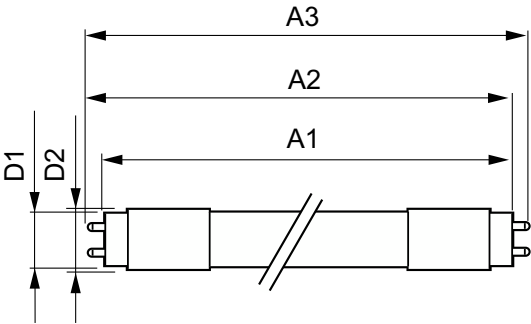


Product	D1	D2	A1	A2	A3
MAS LEDtube 900mm HO 12W 840 T8	25.78 mm	28 mm	893.3 mm	900.4 mm	907.5 mm

MASTER LEDtube EM/Mains T8


Photometric data



Light Distribution Diagram - MAS LEDtube 900mm HO 12W 840 T8




General uniform lighting - MAS LEDtube 900mm HO 12W 840 T8

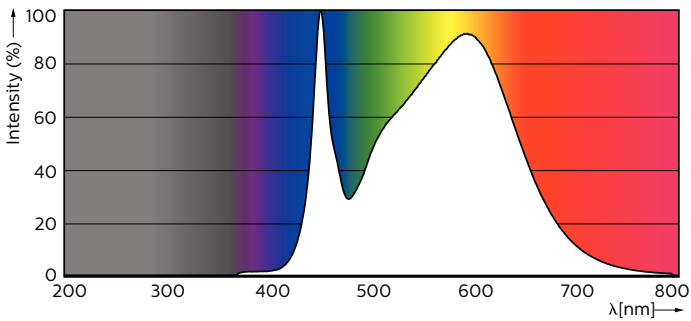


Spectral Power Distribution Colour - MAS LEDtube 900mm HO 12W 840 T8

Lifetime

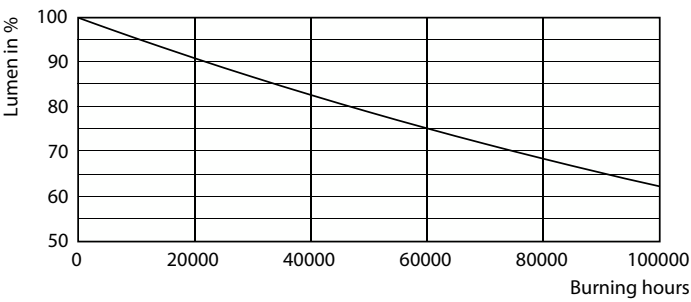

Lumen Maintenance Diagram - MAS LEDtube 900mm HO 12W 840 T8

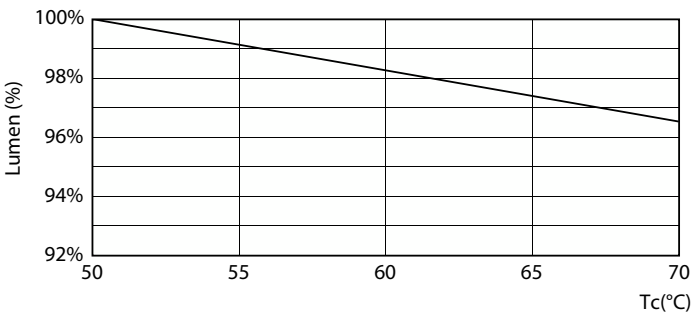

Lumen Maintenance Diagram - MAS LEDtube 900mm HO 12W 840 T8

MASTER LEDtube EM/Mains T8

Lifetime



LEDtube-75K-5070-FailureRate-LED

Life Expectancy Diagram



LifetimeVsTc

