

ALGINE 2w1

SLI037029WW_PW

Downlight luminaire ALGINE 2w1, with a power of 18 W, high light efficacy 122 lm/W. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Suitable for both surface and recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

IK06




Power	18 W	Voltage	230 V
Luminous flux*	2200 lm (360°)	Colour temperature	3000 K
Colour of light	WW	Beam angle	110 °
IK	06	Degree of protection (IP)	IP20

Technical data

Code	SLI037029WW_PW
Power	18 W
Nominal current	140 mA
Voltage	230 V
Energy consumption	18 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	Yes
Power factor	0.5
Useful luminous flux*	2200 lm (360°)
Luminous flux**	1750 lm (360°)
Lamp efficacy	122 lm/W
Luminous intensity	670 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	110 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	223x35 mm
Mounting hole	200 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	Inside
Made in	PRC

Logistics data

Bulk packaging	20 pcs.
Quantity per pallet	400 pcs.
Gross weight (1 pcs.)	0.39 kg

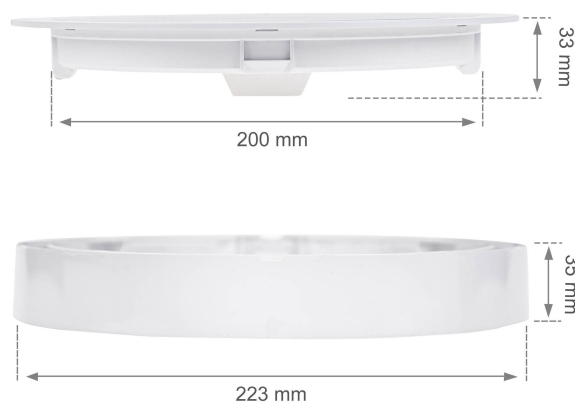

Related documents

 User manual Declaration of Conformity Photometric file 3D model

