


ALGINE 2w1

SLI037028WW_PW

Downlight luminaire ALGINE 2w1, with a power of 12 W, high light efficacy 125 lm/W. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Suitable for both surface and recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power	12 W
Luminous flux*	1500 lm (360°)
Colour of light	WW
IK	06


Voltage	230 V
Colour temperature	3000 K
Beam angle	110 °
Degree of protection (IP)	IP20

Technical data

Code	SLI037028WW_PW
Power	12 W
Nominal current	98 mA
Voltage	230 V
Energy consumption	12 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	Yes
Power factor	0.5
Useful luminous flux*	1500 lm (360°)
Luminous flux**	1200 lm (360°)
Lamp efficacy	125 lm/W
Luminous intensity	420 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	110 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Warranty	2 years
Lifespan	17000 h
(On/Off)	15000
Housing material	PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	170x35 mm
Mounting hole	145 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	Inside
Certified by the National Institute of Hygiene	Yes
Made in	PRC

Logistics data

Bulk packaging	40 pcs.
Quantity per pallet	800 pcs.
Gross weight (1 pcs.)	0.25 kg

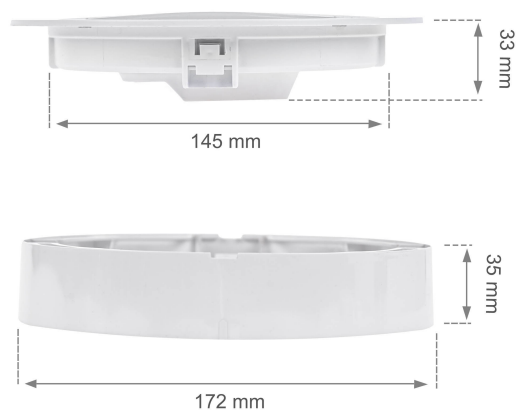

Related documents

 User manual Declaration of Conformity Photometric file 3D model

