


ALGINE LINE BLACK

SLI035050NW_BLACK_PW

LED panel ALGINE LINE BLACK, with a power of 44 W, high light efficacy 130 lm/W. It is made of high-quality components, supported by a 5-year warranty. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Narrow beam angle 70° gives directional light so that selected objects or surfaces can be better exposed. Suitable for surface, recessed and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power **44 W**
Luminous flux* **5700 lm (360°)**
Colour of light **Neutral white**
UGR **<16**


Voltage **230 V**
Colour temperature **4000 K**
Beam angle **70 °**
IK **06**

Technical data

Code	SLI035050NW_BLACK_PW
Power	44 W
Nominal current	200 mA
Voltage	230 V
Energy consumption	44 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Manufacturer of power supply	SPECTRUM
Power factor	0.9
Useful luminous flux*	5700 lm (360°)
Luminous flux**	5300 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	70 °
UGR	<16
RA	>80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	5 years
Lifespan	50000 h
(On/Off)	25000
Housing material	STAL
IK	06
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	597x597x40 mm
Mounting hole	565X565 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Certified by the National Institute of Hygiene	Yes
Made in	PRC

Logistics data

Bulk packaging	5 pcs.
Quantity per pallet	70 pcs.
Gross weight (1 pcs.)	3.4 kg

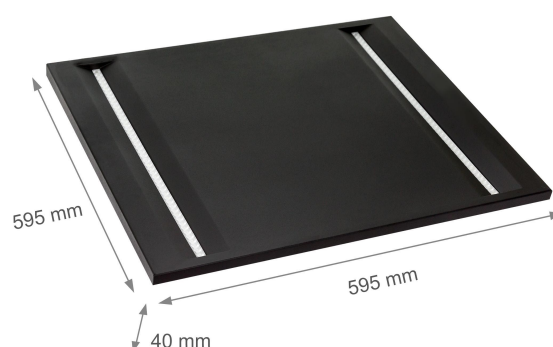

Related documents

 User manual Declaration of Conformity Photometric file

