

# PRODUCT DATASHEET

## FL 20 P 17W 2K4LM 840 PS SY100 BK

FLOODLIGHT 20 | Versatile floodlight with up to 2400 lm light output



PERFOR-  
MANCE  
CLASS

### Areas of application

- Replacement for floodlights with halogen lamps
- Outdoor use (IP66)
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, e.g. by accumulation of dust
- Public areas
- Building facades
- Construction areas
- Parking
- Gardens and balconies

### Product benefits

- Breather membrane to optimize air exchange, without compromising IP protection
- Highly versatile due to selectable power steps (Multi Lumen) on the housing
- Robust cable gland with integrated waterstop function
- Safe and very uniform illumination, due to frosted and tempered glass diffuser
- Bright, robust and durable
- Energy savings of up to 90 % compared to halogen lamp floodlights
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt

### Product features

- High luminous efficacy: up to 145 lm/W
- Type of protection: IP66
- Pre-installed, flexible 1 m cable (H05RN-F), wrapped 3 x 1.0 mm<sup>2</sup> single wires
- Reflector-based, symmetric light distribution with 100° x 100° beam angle
- Mounting bracket with 30° angle and wide rotation area


## TECHNICAL DATA

### Electrical data


Nominal wattage	17 W / 11 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	75/60 mA
Inrush current	7.32 A
Inrush current time $T_{h50}$	23.4 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	102
Max. number of luminaires per miniature circuit breaker C10	81
Max. number of luminaires per miniature circuit breaker C16	131
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 20 %
Protection class	I
Surge capability (L-N)	2 kV
Surge capability (L/N-Ground)	4 kV
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	2400 lm / 1600 lm
Luminous efficacy	145 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	80
Standard deviation of color matching	5 sdc <sub>m</sub>
Stroboscope effect metric (SVM)	≤0.9
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	100 ° x 100 °

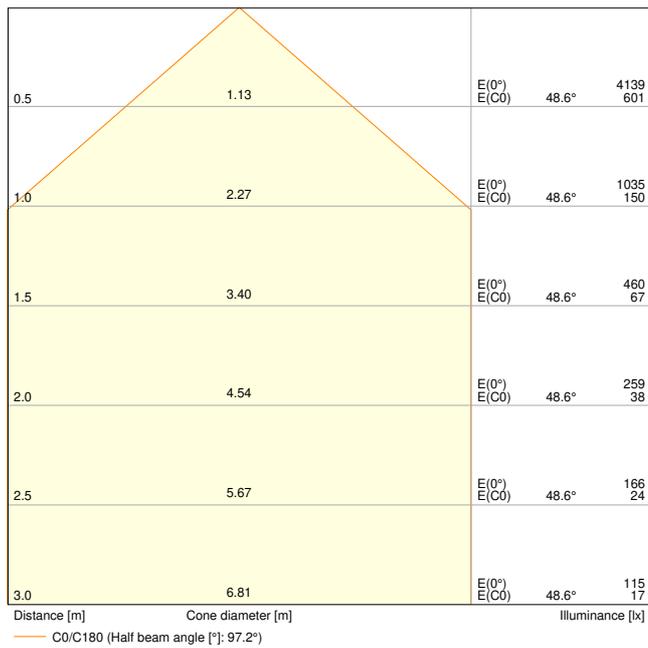


FL 20 P 17W 2K4LM 840 PS SY100 BK

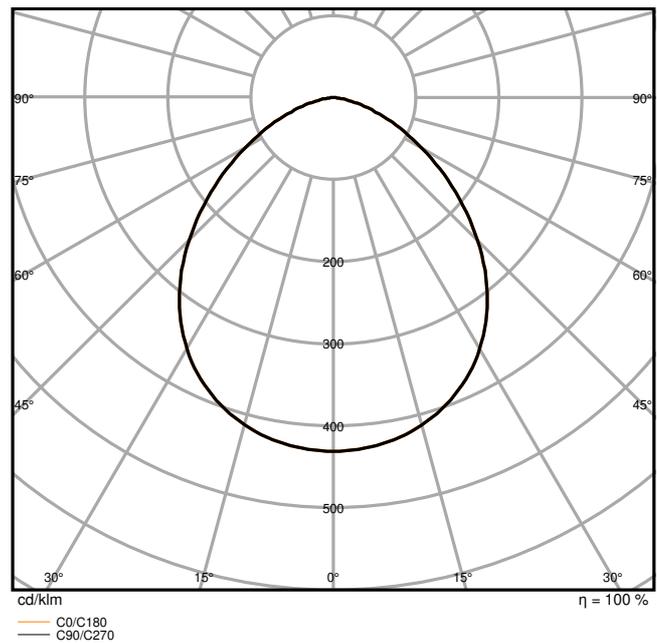

FL 20 P 17W 2K4LM 840 PS SY100 BK

### Dimensions & Weight

Length	157.00 mm
Width	38.00 mm
Height	141.00 mm
Product weight	526.00 g
Cable length	1000 mm



FL 20 P SY100

### Materials & Colors

Product color	Black
Housing color	Black

RAL Color (most similar)	RAL 9017
Body material	Aluminum
Cover material	Glass
Light emitting surface material	Glass
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-40...+70 °C
Type of connection	Cable, 3-pole
Type of protection	IP66
Protection class IK (shock resistance)	IK07
Corrosion resistance class acc. to EN 12944	C4
Dimmable	No
Mounting type	Surface
Mounting location	Wall / Ceiling / Floor
Application environment	Outdoor
Adjustable	Yes
With light source	Yes
Replaceable light source	No

### Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	75000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	133 mA
ECG - Output ripple current	< 20 %

### Certificates & Standards

Standards	CE / CB / ENEC / EAC / UKCA / EPD
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No
EPD	LEDV-00031-V01.01-EN
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

Safety advice

– Max. wind load surface 0.015 m<sup>2</sup>

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	G11193706_UI_Floodlight_08W-41W
	Legal information	Insert_LSI_Floodlight_8_41w_G11195967
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205496
	Legal information	Legal Insert G11257402
	Declarations of conformity	FLOODLIGHT GEN4
	Declarations of conformity UKCA	FLOODLIGHT GEN4
	EPD	EPD EN FLOODLIGHT GEN 4 LP SENSOR

Photometric and lighting design files		Document name
	IES file (IES)	FL 20 P 17W 2K4LM 840 PS SY100 BK
	LDT file (Eulumdat)	FL 20 P 17W 2K4LM 840 PS SY100 BK
	ULD file (DIALux)	FL 20 P 17W 2K4LM 840 PS SY100 BK
	ROLF file (RELUX)	FL 20 P 17W 2K4LM 840 PS SY100 BK
	UGR file (UGR table)	FL 20 P 17W 2K4LM 840 PS SY100 BK
	Light distribution curve type cone	FL 20 P 17W 2K4LM 840 PS SY100 BK
	Light distribution curve type polar	FL 20 P 17W 2K4LM 840 PS SY100 BK

CAD/BIM files		Document name
	BIM Revit 3D	Floodlight G4
	CAD STEP 3D	FL G4 17W


Tender texts		Document name
	Tender documents	FLOODLIGHT 20 17W 2K4LM 840 PS SY100 BK-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854305825	Folding box 1	64 mm x 162 mm x 150 mm	585.00 g	1.56 dm <sup>3</sup>
4099854305832	Shipping box 12	402 mm x 338 mm x 175 mm	7604.00 g	23.78 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.



**ADDITIONAL CATALOG INFORMATION**



230 Vac					
	A	B	C		
8W	80	48	5,5	2x M4	0,013m <sup>2</sup>
17W	70	58	8,5	2x M5	0,015m <sup>2</sup>
41W	108	78	8,5	2x M5	0,025m <sup>2</sup>

	C10A	B16A	C16A
	78	98	126
	40	50	64



FL 10 P 8W 102LM 840 PS SY100	8 W / 1000 lm	8 W / 1000 lm
FL 10 P 8W 102LM 840 PS SY100	8 W / 800 lm	8 W / 1000 lm
FL 10 P 8W 102LM 840 PS SY100	8 W / 800 lm	8 W / 1000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm
FL 20 P 17W 2K4LM 840 PS SY100	17 W / 1800 lm	17 W / 2000 lm

**References / Links**

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.