

# ANDROMEDA PRIME

SLI033035CCT\_PW

On track luminaire ANDROMEDA PRIME with the possibility of changing the light color (CCT), with a power of 16 W, high light efficacy 109 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. Narrow beam angle 25° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.

CCT




|                           |                       |
|---------------------------|-----------------------|
| Power                     | <b>16 W</b>           |
| Luminous flux*            | <b>1750 lm (360°)</b> |
| Colour of light           | <b>CCT</b>            |
| Degree of protection (IP) | <b>IP20</b>           |

|                    |                         |
|--------------------|-------------------------|
| Voltage            | <b>230 V</b>            |
| Colour temperature | <b>2700/4000/6000 K</b> |
| Beam angle         | <b>25 °</b>             |

## Technical data

|                              |                                                    |
|------------------------------|----------------------------------------------------|
| Code                         | SLI033035CCT_PW                                    |
| Power                        | 16 W                                               |
| Nominal current              | 120 mA                                             |
| Voltage                      | 230 V                                              |
| Energy consumption           | 16 kWh/1000h                                       |
| Frequency                    | 50HZ Hz                                            |
| Protection class             | I                                                  |
| Power factor                 | 0.5                                                |
| Useful luminous flux*        | 1750 lm (360°)                                     |
| Luminous flux**              | 1200 lm (360°)                                     |
| Lamp efficacy                | 109 lm/W                                           |
| Luminous intensity           | 5900 cd                                            |
| Colour temperature           | 2700/4000/6000 K                                   |
| Colour of light              | CCT                                                |
| Beam angle                   | 25 °                                               |
| RA                           | 80                                                 |
| Light source included        | Yes                                                |
| Uniformity of color SDCM max | 5                                                  |
| Dimmable                     | No                                                 |
| Working temperature range    | -20/+40 °                                          |
| Lifespan                     | 17000 h                                            |
| Housing material             | Aluminum, PLASTIC                                  |
| Degree of protection (IP)    | IP20                                               |
| Colour                       | Black                                              |
| Dimension (AxBxC)            | 63x134x184 mm                                      |
| For use                      | Inside/Outside                                     |
| Assembly method              | on track                                           |
| Application                  | Inside                                             |
| Made in                      | PRC                                                |
| Other                        | Light color change function<br>2700K/4000K/6000K , |

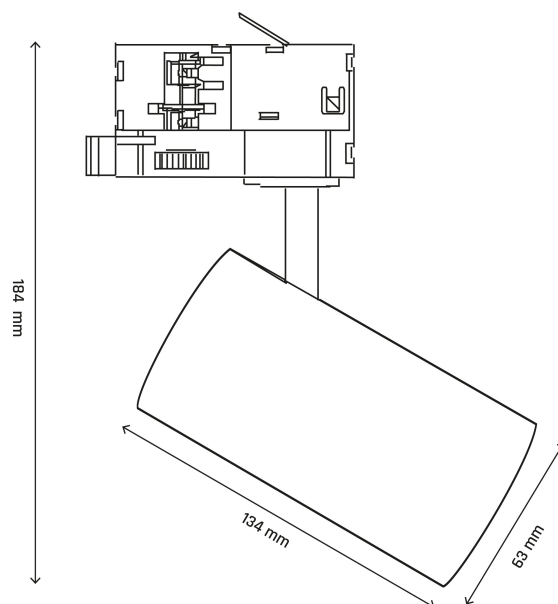

## Related documents

 User manual Declaration of Conformity Photometric file

