

ANDROMEDA PRIME

SLI033036CCT_PW

On track luminaire ANDROMEDA PRIME with the possibility of changing the light color (CCT), with a power of 24 W, high light efficacy 113 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700/4000/6000K, we can adjust the light color depending on our needs and preferences. Narrow beam angle 25° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.

CCT



Power	24 W
Luminous flux*	2700 lm (360°)
Colour of light	CCT
Degree of protection (IP)	IP20


Voltage	230 V
Colour temperature	2700/4000/6000 K
Beam angle	25 °

Technical data

Code	SLI033036CCT_PW
Power	24 W
Nominal current	175 mA
Voltage	230 V
Energy consumption	24 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power factor	0.5
Useful luminous flux*	2700 lm (360°)
Luminous flux**	1800 lm (360°)
Lamp efficacy	113 lm/W
Luminous intensity	11000 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	25 °
RA	80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum, PLASTIC
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	76x177x228 mm
For use	Inside/Outside
Assembly method	on track 3-fazowy
Application	Inside
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,

Logistics data

Bulk packaging	25 pcs.
Quantity per pallet	425 pcs.
Gross weight (1 pcs.)	0.34 kg

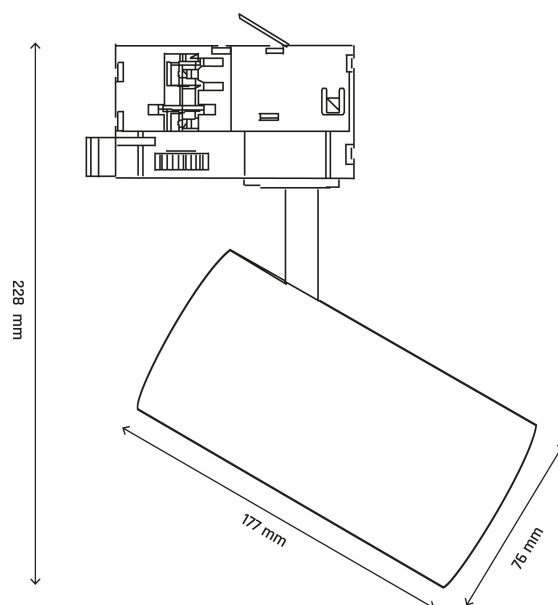

Related documents

 User manual Declaration of Conformity Photometric file 3D model

