


ANDROMEDA

SLI033022NW_PW

LED luminaire ANDROMEDA, with power regulation on the power supply (15-27 W), high light efficacy 119 lm/W. The luminaire have an additional reflector (included with the luminaire) so that the lighting angle can be changed 36 or 60 degrees. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Designed to be mounted on a track.



Power **15-27 W**
Colour temperature **4000 K**
Beam angle **36, 60 °**


Voltage **230 V**
Colour of light **Neutral white**
Degree of protection (IP) **IP20**

Technical data

Code	SLI033022NW_PW
Power	15-27 W
Nominal current	120 mA
Voltage	230 V
Energy consumption	27 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	Yes
Power factor	0.9
Useful luminous flux*	3200 lm (360°)
Luminous flux**	1600-2600 lm (360°)
Lamp efficacy	119 lm/W
Luminous intensity	6100 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	36, 60 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	5 years
Lifespan	50000 h
(On/Off)	25000
Housing material	Aluminum, PLASTIC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	74x170x170 mm
For use	Inside
Assembly method	on track 3-fazowy
Application	Inside
Made in	PRC
Other	DIP SWITCH - adjustable power of luminaire ,

Logistics data

Bulk packaging	24 pcs.
Quantity per pallet	366 pcs.
Gross weight (1 pcs.)	0.67 kg

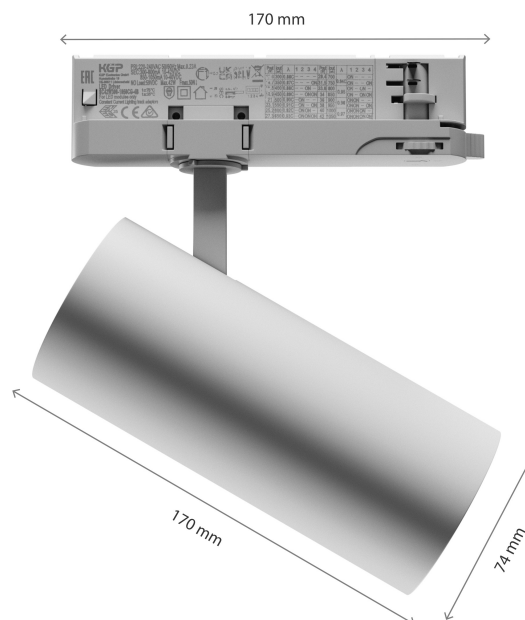

Related documents


 User manual

 Declaration of Conformity

 Photometric file

 3D model

