

# HALLS LINE

SLI048004NW\_PW

High bay luminaire HALLS LINE, with a power of 200 W, high light efficacy 150 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP66, providing protection against the ingress of dust and water jets. IK10 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Narrow beam angle 90° gives directional light so that selected surfaces can be better exposed. Designed for suspended mounting.




|                 |                        |                           |               |
|-----------------|------------------------|---------------------------|---------------|
| Power           | <b>200 W</b>           | Voltage                   | <b>230 V</b>  |
| Luminous flux*  | <b>30000 lm (360°)</b> | Colour temperature        | <b>4000 K</b> |
| Colour of light | <b>Neutral white</b>   | Beam angle                | <b>90 °</b>   |
| IK              | <b>10</b>              | Degree of protection (IP) | <b>IP66</b>   |

## Technical data

|                                                        |                 |
|--------------------------------------------------------|-----------------|
| Code                                                   | SLI048004NW_PW  |
| Power                                                  | 200 W           |
| Nominal current                                        | 850 mA          |
| Voltage                                                | 230 V           |
| Energy consumption                                     | 200 kWh/1000h   |
| Frequency                                              | 50HZ Hz         |
| Protection class                                       | I               |
| Power supply included                                  | Yes             |
| Power factor                                           | 0.95            |
| Useful luminous flux*                                  | 30000 lm (360°) |
| Luminous flux**                                        | 28000 lm (360°) |
| Lamp efficacy                                          | 150 lm/W        |
| Luminous intensity                                     | 15500 cd        |
| Colour temperature                                     | 4000 K          |
| Colour of light                                        | Neutral white   |
| Beam angle                                             | 90 °            |
| RA                                                     | >80             |
| Light source included                                  | Yes             |
| Dimmable                                               | Yes             |
| Working temperature range                              | -20 +40 °       |
| Lifespan                                               | 50000 h         |
| Housing material                                       | Aluminum        |
| IK                                                     | 10              |
| Degree of protection (IP)                              | IP66            |
| Colour                                                 | Black           |
| Dimension (AxBxC)                                      | 990x126x95 mm   |
| For use                                                | Outside/Inside  |
| Assembly method                                        | Suspended       |
| Whether it should work in conditions other than normal | Yes             |
| Made in                                                | PRC             |

## Logistics data

|                       |         |
|-----------------------|---------|
| Bulk packaging        | 2 pcs.  |
| Quantity per pallet   | 56 pcs. |
| Gross weight (1 pcs.) | 3.6 kg  |

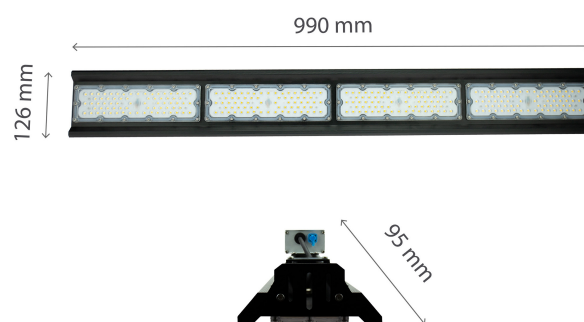

## Related documents

 User manual Declaration of Conformity Photometric file

