

HALLS LINE

SLI048004NW_PW

High bay luminaire HALLS LINE, with a power of 200 W, high light efficacy 150 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a very high degree of protection IP66, providing protection against the ingress of dust and water jets. IK10 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Narrow beam angle 90° gives directional light so that selected surfaces can be better exposed. Designed for suspended mounting.



IP66

IK10




Power	200 W	Voltage	230 V
Luminous flux*	30000 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	90 °
IK	10	Degree of protection (IP)	IP66

Technical data

Code	SLI048004NW_PW
Power	200 W
Nominal current	850 mA
Voltage	230 V
Energy consumption	200 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	Yes
Power factor	0.95
Useful luminous flux*	30000 lm (360°)
Luminous flux**	28000 lm (360°)
Lamp efficacy	150 lm/W
Luminous intensity	15500 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	90 °
RA	>80
Light source included	Yes
Dimmable	Yes
Working temperature range	-20 +40 °
Warranty	5 years
Lifespan	50000 h
Housing material	Aluminum
IK	10
Degree of protection (IP)	IP66
Colour	Black
Dimension (AxBxC)	990x126x95 mm
For use	Outside / Inside
Assembly method	Suspended
Whether it should work in conditions other than normal	Yes
Made in	PRC

Logistics data

Bulk packaging	2 pcs.
Quantity per pallet	56 pcs.
Gross weight (1 pcs.)	3.6 kg

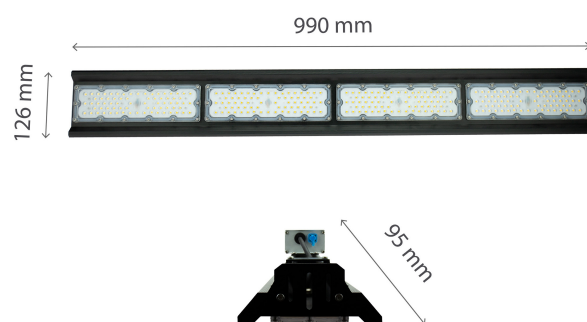

Related documents

 User manual Declaration of Conformity Photometric file

