


LED G4

W0J+13842

LED source LED G4 2 W in silicone cover. It is perfect for use in households, hotels, shops, or restaurants as decorative or accent lighting, and can be installed in luminaires that have a G4 base.. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Wide beam angle 270° ensures even illumination of the room.

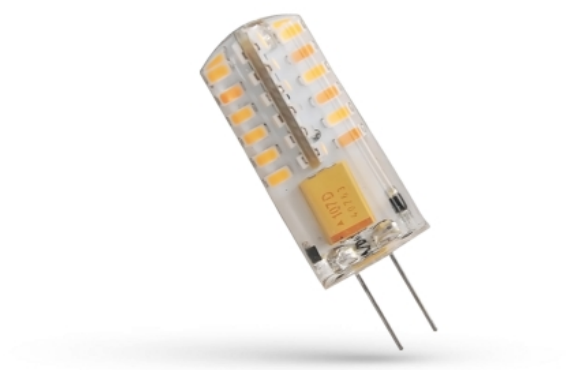

Power	2 W	Voltage	12 V
Luminous flux**	165 lm (360°)	Colour temperature	3000 K
Colour of light	WW	Beam angle	270 °
Socket	G4		

Technical data

Code	WQJ+13842
Power	2 W
Nominal current	240 mA
Voltage	12 V
Energy efficiency class	G
Energy consumption	3 kWh/1000h
Frequency	0-50HZ Hz
Power factor	0,5
Useful luminous flux*	165 lm (360°)
Luminous flux**	165 lm (360°)
Lamp efficacy	82 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	270 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Socket	G4
Dimension (AxBxC)	13,5x36,5 mm
For use	Inside
Application	INT
Made in	PRC

Logistics data

Bulk packaging	500 pcs.
Quantity per pallet	15000 pcs.
Gross weight (1 pcs.)	0.006 kg

Related documents



 Declaration of Conformity

