

NOCTIS LUX 2

SLI029039CW

Floodlight NOCTIS LUX 2, with a power of 30 W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. It shines with a cold light (6000K). Designed for surface mounting.




Power	30 W	Voltage	230 V
Luminous flux*	2770 lm (120°)	Colour temperature	6000 K
Colour of light	CW	Beam angle	100 °
Degree of protection (IP)	IP65		

Technical data

Code	SLI029039CW
Power	30 W
Nominal current	130 mA
Voltage	230 V
Energy consumption	30 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Power factor	0.9
Useful luminous flux*	2770 lm (120°)
Luminous flux**	2700 / 2770 lm (360°)
Lamp efficacy	90 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	100 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	2 years
Lifespan	17000 h
(On/Off)	15000
Housing material	Aluminum, GLASS
Degree of protection (IP)	IP65
Colour	Black
Dimension (AxBxC)	120x160x28 mm
For use	Inside / Outside
Assembly method	On the ceiling
Application	INT / EXT
Made in	PRC

Logistics data

Bulk packaging	20 pcs.
Quantity per pallet	720 pcs.
Gross weight (1 pcs.)	0.43 kg

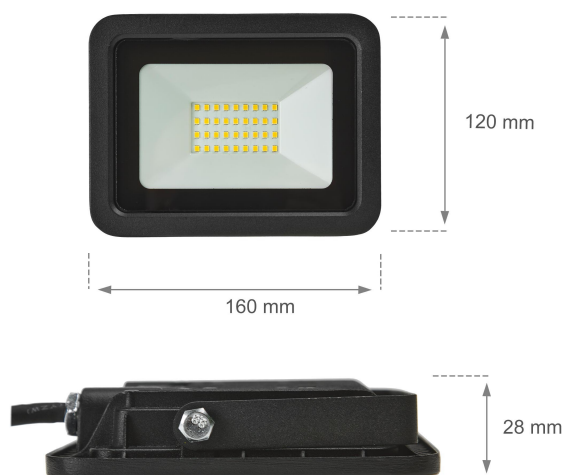

Related documents

 Declaration of Conformity Photometric file

