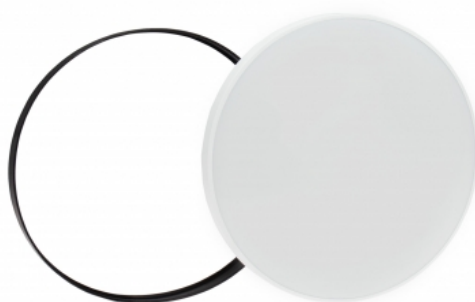


# NYMPHEA BLACK & WHITE

SLI031036NW\_PW

Plafond NYMPHEA BLACK & WHITE, with a power of 32 W, high light efficacy 106 lm/W. It has a high IP54 rating, making it ideal for use in rooms with high humidity. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Designed for surface mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

**IP54**

|                           |                       |                    |               |
|---------------------------|-----------------------|--------------------|---------------|
| Power                     | <b>32 W</b>           | Voltage            | <b>230 V</b>  |
| Luminous flux*            | <b>3400 lm (360°)</b> | Colour temperature | <b>4000 K</b> |
| Colour of light           | <b>Neutral white</b>  | Beam angle         | <b>115 °</b>  |
| Degree of protection (IP) | <b>IP54</b>           |                    |               |

## Technical data

|                              |                |
|------------------------------|----------------|
| Code                         | SLI031036NW_PW |
| Power                        | 32 W           |
| Nominal current              | 142 mA         |
| Voltage                      | 230 V          |
| Energy consumption           | 32 kWh/1000h   |
| Frequency                    | 50HZ Hz        |
| Protection class             | II             |
| Power supply included        | +              |
| Power factor                 | 0.98           |
| Useful luminous flux*        | 3400 lm (360°) |
| Luminous flux**              | 2250 lm (360°) |
| Lamp efficacy                | 106 lm/W       |
| Luminous intensity           | 1360 cd        |
| Colour temperature           | 4000 K         |
| Colour of light              | Neutral white  |
| Beam angle                   | 115 °          |
| RA                           | >80            |
| Light source included        | +              |
| Uniformity of color SDCM max | 5              |
| Dimmable                     | No             |
| Working temperature range    | -20 +40 °      |
| Warranty                     | 2 years        |
| Lifespan                     | 17000 h        |
| Housing material             | Plastic        |
| Degree of protection (IP)    | IP54           |
| Colour                       | White          |
| Dimension (AxBxC)            | 380x55 mm      |
| For use                      | Inside         |
| Assembly method              | On the ceiling |
| Application                  | Inside         |
| Made in                      | PRC            |

## Logistics data

|                       |          |
|-----------------------|----------|
| Bulk packaging        | 20 pcs.  |
| Quantity per pallet   | 120 pcs. |
| Gross weight (1 pcs.) | 0.793 kg |



## Related documents

 Declaration of Conformity Photometric file

