

PASTILO CCT

SLI042000CCT_PW

LED luminaire PASTILO CCT with the possibility of changing the light color (CCT), with a power of 10 W, high light efficacy 120 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. IK10 class provides impact resistance. Designed for surface mounting.

CCT

IP54

IK10




Power	10 W	Voltage	230 V
Luminous flux*	1200 lm (360°)	Colour temperature	2700 / 4000 / 6000 K
Colour of light	CCT	Beam angle	120 °
IK	10	Degree of protection (IP)	IP54

Technical data

Code	SLI042000CCT_PW
Power	10 W
Nominal current	80 mA
Voltage	230 V
Energy consumption	10 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.5
Useful luminous flux*	1200 lm (360°)
Luminous flux**	1100 lm (360°)
Lamp efficacy	120 lm/W
Colour temperature	2700 / 4000 / 6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	2 years
Lifespan	17000 h
Housing material	Plastic
IK	10
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	205x105x47 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT / EXT
Made in	PRC
Other	Light color change function 2700K / 4000K / 6000K ,

Logistics data

Bulk packaging	30 pcs.
Quantity per pallet	900 pcs.
Gross weight (1 pcs.)	0.3 kg

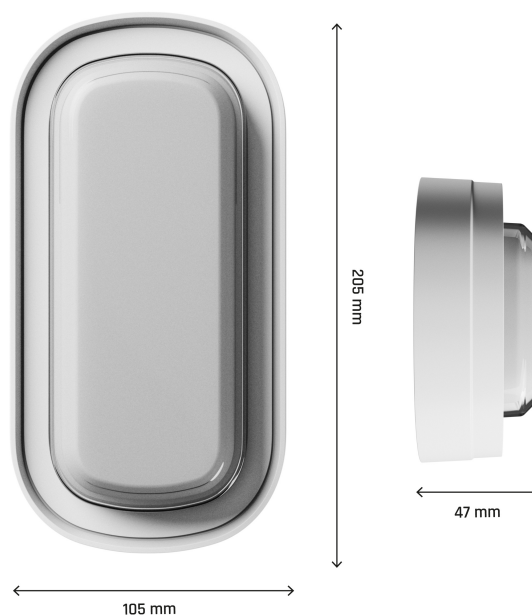

Related documents

 User manual Declaration of Conformity Photometric file

