


# PAVA BASIC

SLI033032CCT\_PW

On track luminaire PAVA BASIC with the possibility of changing the light color (CCT), with a power of 20 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. Designed to be mounted on a track.




|                           |                       |                    |                             |
|---------------------------|-----------------------|--------------------|-----------------------------|
| Power                     | <b>20 W</b>           | Voltage            | <b>230 V</b>                |
| Luminous flux*            | <b>2225 lm (360°)</b> | Colour temperature | <b>3000 / 4000 / 6000 K</b> |
| Colour of light           | <b>CCT</b>            | Beam angle         | <b>20-45 °</b>              |
| Degree of protection (IP) | <b>IP20</b>           |                    |                             |

## Technical data

|                              |                                                        |
|------------------------------|--------------------------------------------------------|
| Code                         | SLI033032CCT_PW                                        |
| Power                        | 20 W                                                   |
| Nominal current              | 145 mA                                                 |
| Voltage                      | 230 V                                                  |
| Energy consumption           | 20 kWh/1000h                                           |
| Frequency                    | 50HZ Hz                                                |
| Protection class             | I                                                      |
| Power supply included        | Yes                                                    |
| Power factor                 | 0.5                                                    |
| Useful luminous flux*        | 2225 lm (360°)                                         |
| Luminous flux**              | 1700 lm (360°)                                         |
| Lamp efficacy                | 111 lm/W                                               |
| Luminous intensity           | 3100 cd                                                |
| Colour temperature           | 3000 / 4000 / 6000 K                                   |
| Colour of light              | CCT                                                    |
| Beam angle                   | 20-45 °                                                |
| RA                           | 80                                                     |
| Light source included        | Yes                                                    |
| Uniformity of color SDCM max | 5                                                      |
| Dimmable                     | No                                                     |
| Working temperature range    | -20 / +40 °                                            |
| Warranty                     | 2 years                                                |
| Lifespan                     | 17000 h                                                |
| (On/Off)                     | 15000                                                  |
| Housing material             | Aluminum, PLASTIC                                      |
| Degree of protection (IP)    | IP20                                                   |
| Colour                       | White                                                  |
| Dimension (AxBxC)            | 84x136x185 mm                                          |
| For use                      | Inside                                                 |
| Assembly method              | on track 3-fazowy                                      |
| Application                  | Inside                                                 |
| Made in                      | PRC                                                    |
| Other                        | Light color change function<br>3000K / 4000K / 6000K , |

## Logistics data

|                       |          |
|-----------------------|----------|
| Bulk packaging        | 20 pcs.  |
| Quantity per pallet   | 400 pcs. |
| Gross weight (1 pcs.) | 0.52 kg  |

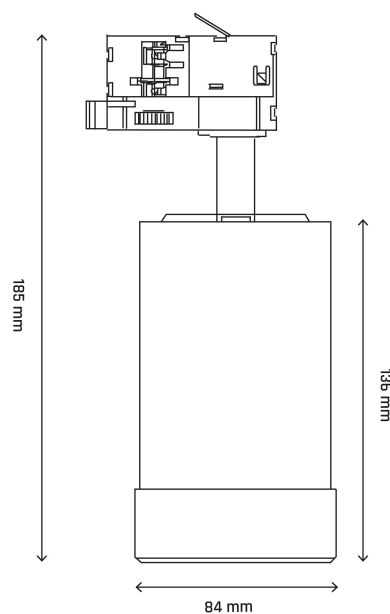

## Related documents

 User manual Declaration of Conformity Photometric file 3D model

