



CorePro LEDspot MV



Corepro LEDspot 2.7-25W GU10 827 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. These GU10 LED spot lights are compatible with most existing fixtures with a GU10 LED base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance costs.

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	215 lm
Luminous Intensity (Nom)	470 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	79.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	215 lm
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2.7 W
Lamp Current (Nom)	29 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Shape	PAR16
Net Weight (Piece)	0.045 kg


CorePro LEDspot MV

Approval and Application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	3 kWh
EPREL Registration Number	387359
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4

Application Conditions


can it be used in closed luminaires	No
-------------------------------------	----

Dimensional drawing




Product	D	C
Corepro LEDspot 2.7-25W GU10 827 36D	50 mm	53 mm

Photometric data




Light Distribution Diagram - Corepro LEDspot 2.7-25W GU10 827 36D



General uniform lighting - Corepro LEDspot 2.7-25W GU10 827 36D

CorePro LEDspot MV

Photometric data

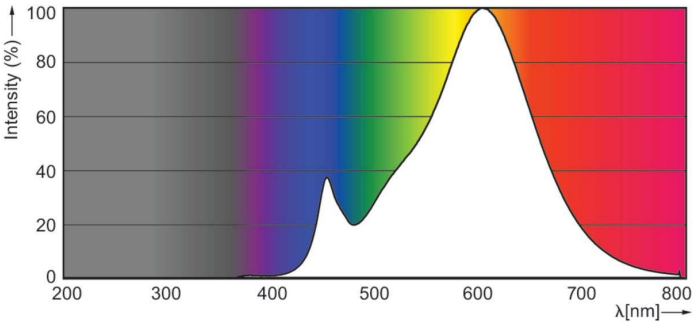

Spectral Power Distribution Colour - Corepro LEDspot 2.7-25W GU10 827 36D

