



# CorePro GLASS LED candles and lusters



## CorePro LEDLusterND2-25W P45 E27 827 CLG

Featuring a classic heritage design, these filament LED candle combines the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb, a very easy choice for people who are looking for a retrofit LED replacement, the LED candle provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

### **Product data**

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux	250 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	125.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1

Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	2 W	
Lamp Current (Nom)	20 mA	
Wattage Equivalent	25 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.4	
Voltage (Nom)	220-240 V	
Temperature		
T-Case Maximum (Nom)	30 ℃	
Controls and Dimming		
Dimmable	No	


Datasheet, 2025, April 16 data subject to change

# CorePro GLASS LED candles and lusters

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	P45
Net Weight (Piece)	0.014 kg
Approval and Application	
Energy Efficiency Class	E
Energy Consumption kWh/1000 h	2 kWh
EPREL Registration Number	387364
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Application Conditions	
can it be used in closed luminaires	No


Product Data	
Order product name	CorePro LEDLusterND2-25W P45 E27
	827 CLG
Full product name	CorePro LEDLusterND2-25W P45 E27
	827 CLG
Full product code	871951434776200
Order code	929001238792
Material Nr. (12NC)	929001238792
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514347762
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514347779


# Dimensional drawing



Product	D	С
CorePro LEDLusterND2-25W P45 E27 827 CLG	45 mm	78 mm

## Photometric data

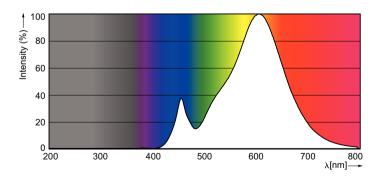




180°

Spectral Power Distribution Colour - CorePro LEDLusterND2-25W P45 E27 827 CLG

Light Distribution Diagram - CorePro LEDLusterND2-25W P45 E27 827 CLG


## CorePro GLASS LED candles and lusters


### Photometric data



General uniform lighting - CorePro LEDLusterND2-25W P45 E27 827 CLG

### Lifetime

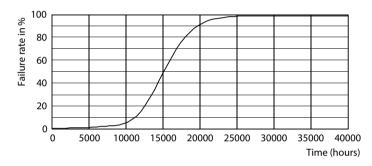

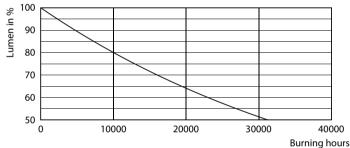

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDLusterND2-25W P45 E27 827 CLG



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.