

PAVA BASIC

SLI033032CCT_PW

On track luminaire PAVA BASIC with the possibility of changing the light color (CCT), with a power of 20 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. Designed to be mounted on a track.

CCT




Power	20 W	Voltage	230 V
Luminous flux*	2225 lm (360°)	Colour temperature	3000 / 4000 / 6000 K
Colour of light	CCT	Beam angle	20-45 °
Degree of protection (IP)	IP20		

Technical data

Code	SLI033032CCT_PW
Power	20 W
Nominal current	145 mA
Voltage	230 V
Energy consumption	20 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	Yes
Power factor	0.5
Useful luminous flux*	2225 lm (360°)
Luminous flux**	1700 lm (360°)
Lamp efficacy	111 lm/W
Luminous intensity	3100 cd
Colour temperature	3000 / 4000 / 6000 K
Colour of light	CCT
Beam angle	20-45 °
RA	80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 / +40 °
Warranty	2 years
Lifespan	17000 h
Housing material	Aluminum, PLASTIC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	84x136x185 mm
For use	Inside
Assembly method	on track 3-fazowy
Application	Inside
Made in	PRC
Other	Light color change function 3000K / 4000K / 6000K ,

Logistics data

Bulk packaging	20 pcs.
Quantity per pallet	400 pcs.
Gross weight (1 pcs.)	0.52 kg

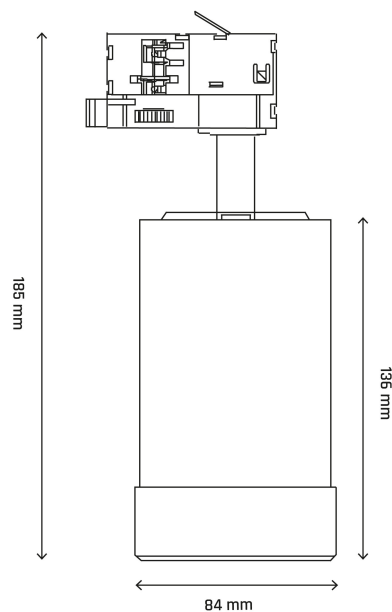

Related documents


 User manual

 Declaration of Conformity

 Photometric file

 3D model

